

# MIT Researchers Discover Self-Healing Metal

*The following press release was published by the MIT News Office in October 2103 and it quickly captured the interest of the science community. The process could lead to stronger and safer metal alloys.*

**IT WAS A RESULT** so unexpected that MIT researchers initially thought it must be a mistake: Under certain conditions, putting a cracked piece of metal under tension — that is, exerting a force that would be expected to pull it apart — has the reverse effect, causing the crack to close and its edges to fuse together.

The surprising finding could lead to self-healing materials that repair incipient damage before it has a chance to spread. The results were published in the journal *Physical Review Letters* in a paper by graduate student Guoqiang Xu and professor of materials science and engineering Michael Demkowicz.

“We had to go back and check,” Demkowicz says, when “instead of extending, [the crack] was closing up. First, we figured out that, indeed, nothing was wrong. The next question was: ‘Why is this happening?’”

The answer turned out to lie in how grain boundaries interact with cracks in the crystalline microstructure of a metal — in this case nickel, which is the basis for “superalloys” used in extreme environments, such as in deepsea oil wells.

By creating a computer model of that microstructure and studying its response to various conditions, “We found that there is a mechanism that can, in principle, close cracks under any applied stress,” Demkowicz says.

A computer simulation of the molecular structure of a metal alloy, showing the boundaries between microcrystalline grains (white lines forming hexagons), shows a small crack (dark horizontal bar just right of bottom center) that mends itself as the metal is put under stress. This simulation was one of several the MIT researchers used to uncover this new self-healing phenomenon.

Most metals are made of tiny crystalline grains whose sizes and orientations can affect strength and other characteristics. But under certain conditions, Demkowicz and Xu found, stress “causes the microstructure to change: It can make grain boundaries migrate. This grain boundary migration is the key to healing the crack,” Demkowicz says.


The very idea that crystal grain boundaries could migrate within a solid metal has been extensively studied within the last decade, Demkowicz says. Self-healing, however, occurs only across a certain kind of boundary, he explains — one

that extends partway into a grain, but not all the way through it. This creates a type of defect known as a “disclination.”

Disclinations were first noticed a century ago, but had been considered “just a curiosity,” Demkowicz says. When he and Xu found the crack-healing behavior, he says, “it took us a while to convince ourselves that what we’re seeing are actually disclinations.”

These defects have intense stress fields, which “can be so strong, they actually reverse what an applied load would do,” Demkowicz says: In other words, when the two sides of a cracked material are pulled apart, instead of cracking further, it can heal. “The stress from the disclinations is leading to this unexpected behavior,” he says.

Having discovered this mechanism, the researchers plan to study how to design metal alloys so cracks would close and heal under loads typical of particular applications. Techniques

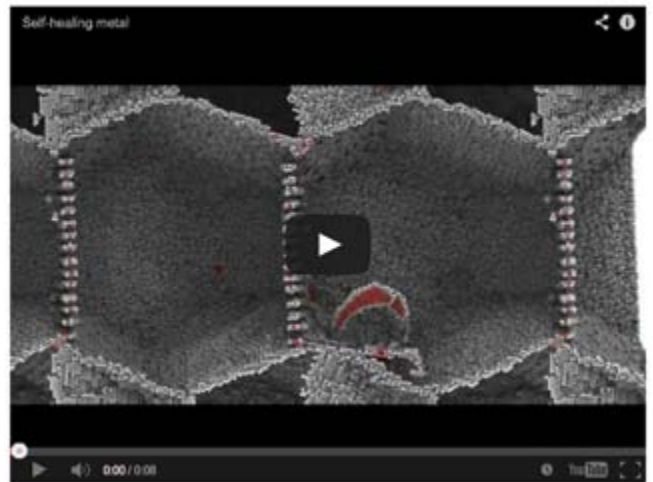

*A computer simulation of the molecular structure of a metal alloy, showing the boundaries between microcrystalline grains (white lines forming hexagons), shows a small crack (dark horizontal bar just right of bottom center) that mends itself as the metal is put under stress. This simulation was one of several the MIT researchers used to uncover this new self-healing phenomenon. See the simulation at [www.youtube.com/watch?feature=player\\_embedded&v=E9pozjnfOLA](http://www.youtube.com/watch?feature=player_embedded&v=E9pozjnfOLA)*  
**Simulation courtesy of Guoqiang Xu and Michael Demkowicz**

**sonats**  
Innovative impact surface treatment solutions

**Empowering Technologies**

**Stressonic**

**Innovative impact surface treatment solutions**

**High Process Control**

clean & green  
high surface quality  
economical  
efficient

**ULTRASONIC**

**Shot Peening  
Impact Treatment  
Needle Straightening**

- StressVoyager<sup>®</sup> Hand-held equipments
- Customized Computer Controlled peening equipments
- Engineering (Process, Feasibility, RSM Characterization)
- Peening Control devices and accessories distribution in Europe

**SONATS**  
2 rue de la Fonderie - B.P 40538 - 44475 CARQUEFOU CEDEX - France  
Phone : +33 (0)2 51 70 04 94 - Fax : +33 (0)2 51 70 05 83  
Email : contact@sonats-et.com | [www.sonats-et.com](http://www.sonats-et.com)

**EMPOWERING TECHNOLOGIES Inc.**  
Suite 319, Greystone Park - Office sector 5511 - Highway 280,  
BIRMINGHAM, AL 35242 - Phone : +1 256 404 4929  
Email : info@empowering-technologies.com | [www.empowering-technologies.com](http://www.empowering-technologies.com)

for controlling the microstructure of alloys already exist, Demkowicz says, so it's just a matter of figuring out how to achieve a desired result.

"That's a field we're just opening up," he says. "How do you design a microstructure to self-heal? This is very new."

The technique might also apply to other kinds of failure mechanisms that affect metals, such as plastic flow instability — akin to stretching a piece of taffy until it breaks. Engineering metals' microstructure to generate disclinations could slow the progression of this type of failure, Demkowicz says.

Such failures can be "life-limiting situations for a lot of materials," Demkowicz says, including materials used in aircraft, oil wells, and other critical industrial applications. Metal fatigue, for example — which can result from an accumulation of nanoscale cracks over time — "is probably the most common failure mode" for structural metals in general, he says.

"If you can figure out how to prevent those nanocracks, or heal them once they form, or prevent them from propagating," Demkowicz says, "this would be the kind of thing you would use to improve the lifetime or safety of a component."

William Gerberich, a professor of chemical engineering and materials science at the University of Minnesota who was not involved in this research, says that the significance of disclinations in materials was initially reassessed a few years ago. Xu and Demkowicz, he says, "have taken this one step further and suggested that wedge dislocations, in conjunction with stress-driven grain boundary migration, could actually heal cracks. This is indeed provocative [and] may be a plausible and exciting pursuit."

The work was funded by the BP-MIT Materials and Corrosion Center. ●

**theshotpeenermagazine.com**



- ▶ Download the latest issue
- ▶ Get advertising rates
- ▶ Request a free subscription
- ▶ Read past issues